




KAISER High performance vacuum pump

Low weight liquid ring vacuum pump for suction and pneumatic conveying of wet and dry material



KWP High performance vacuum pump		900i	1600i 2000i	2400i 3100i	7000i
Max.capacity	m ³ /h / cfm	900 / 530	1600 / 943 2000 / 1178	2400 / 1414 3100 / 1825	7000 / 4120
Max.vacuum	% / "HG	90 / 27	90 / 27	85 / 25	80 / 24
Max.pressure	bar / psi	1.0 / 14.5	1.0 / 14.5	1.0 / 14.5	1.0 / 14.5
Weight*	kg / lb	95 / 209.5	180 / 396.8	210 / 463.0	650 / 1433.0
Length (approx.)	mm / inch	710 / 27.9	1200 / 47.1	1385 / 54.4	1760 / 69.2
Width (approx.)	mm / inch	415 / 16.3	518 / 20.4	518 / 20.4	925 / 36.5
Height (approx.)	mm / inch	495 / 19.5	605 / 23.8	605 / 23.8	955 / 37.6


* mechanical drive

Facts and figures:

- All pumps are made in aluminium low construction weight
- Minimal maintenance permanently lubricated bearings
- V-Belt, flexible coupling or hydraulic motor drive possible
- Environment-friendly no oil in discharge-line
- Extremely quiet operation
- For all kind of suction applications (also dry suction)

KAISER Intercooler-System:

- Fewer fresh water needed
- More payload
- Constant temperature
- No overheating, no cavitation

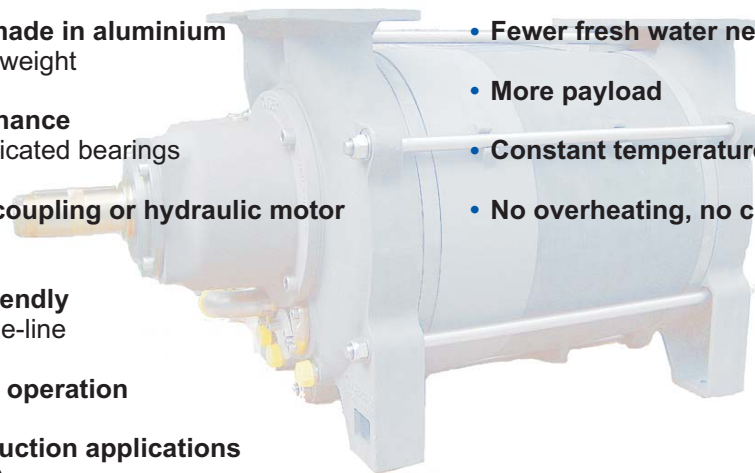

All subject to change without notice!
218012015



KAISER

KAISER AG
Vorarlbergerstrasse 220
9486 Schaanwald • Liechtenstein
Tel. +423 377 21 21 • www.kaiser.li